



CITY POLE

70W Parks and Gardens LED Lighting Luminaire



Order Code : 3303275
Product Code : CTY 070Z 40LN00 8K1 66 PL 6H FLP

Product Data

Standard Features


Housing	: Aluminium Housing (Chromate Conversion Pretreatment)
Optic	: Lens
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: SMD LED

Optical & Electrical Features

Power Consumption	: 2 x 35W
Final Luminous Flux	: 8120 lm
Efficacy	: 116 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is \pm 10% Tolerance in Technical Values.

Photometric Curve

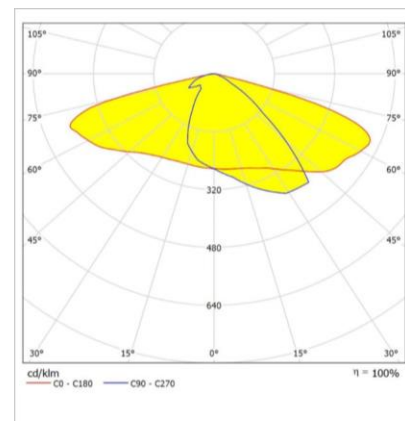

Other Features & Conditions

Operating Temperature Range	: -20°C / +45°C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 45 °C

Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


CITY POLE

72W Parks and Gardens LED Lighting Luminaire

3303275 CTY 070Z 40LN00 8K1 66 PL 6H FLP

Dimensions (mm)

	a	b	h	h1
Standart	200	100	6000	1100

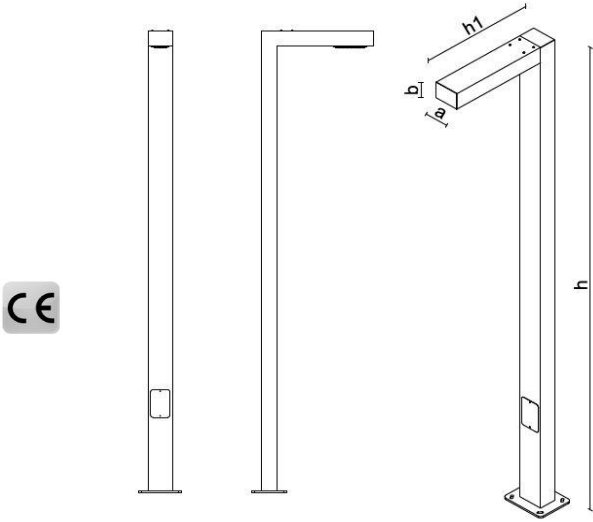

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 649 37 90
www.eaeaydinlatma.com.tr

Revision date: 01.06.2023