



# TOWER BOLARD

15W Urban LED Lighting Luminaire

Order Code : 3271470  
Product Code : TWR 015Z 40CM00 LLL 66 BL 75 FLP



## Product Data

### Standard Features

Housing	: Aluminium Housing
Diffuser	: 4mm Glass
IP Grade	: IP66
Installation	: Floor mounted
Light Source	: COB LED
Electronic Control	: On/Off

### Optical & Electrical Features

Power Consumption	: 14,7 W
Final Luminous Flux	: 773,2 lm
Efficacy	: 52,6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

### Other Features & Conditions

Operating Temperature Range	: -20 °C / +45 °C
Impact Resistance	: IK06
Led Life Time - L70	: > 72.000 hours @Ta= 45 °C

## Photometric Curve

### Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


# TOWER BOLARD

15W Urban LED Lighting Luminaire

3271470 TWR 015Z 40CM00 LLL 66 BL 75 FLP

## Dimensions (mm)

	a	b	h
Standart	150	150	750

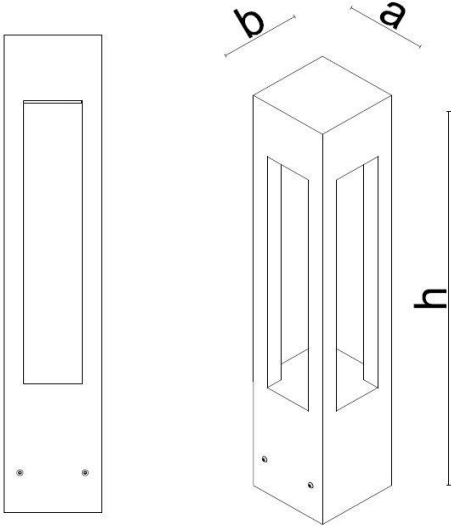

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 6.06.2024