



VALERIA

193 W Front and Area LED Lighting Luminaire



Order Code : 3322321
Product Code : VLR 193Z 40SC00 60 25K5 ELP

Product Data

Standard Features

| | |
|--------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Diffuser | : Tempered Transparent Glass |
| Optic | : 60° lens |
| IP Grade | : IP66 |
| Installation | : Floor Mounted |
| Light Source | : Mid Power LED |
| Electronic Control | : On / Off |


Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 193 W |
| Final Luminous Flux | : 25500 lm |
| Efficacy | : 132 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : > 0,9 |
| Surge Transient Protection | : 6 kV |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

Other Features & Conditions


| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | : -20 °C/ +40 °C |
| Impact Resistance | : IK08 |
| Led Life Time - L70 | : > 72.000 hours @Ta= 40 °C |

Photometric Curve

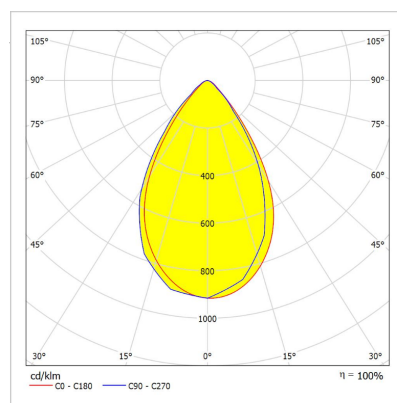

Optional Features

| | |
|-------------------------------|-------------------------------|
| Correlated Color Temperatures | : 3000K, 5000K, 57000K, 6500K |
|-------------------------------|-------------------------------|

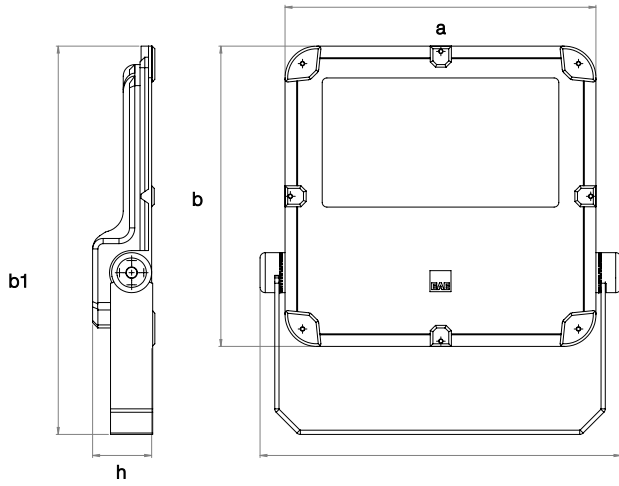

VALERIA

193 W Front and Area LED Lighting Luminaire

3322321 VLR 193Z 40SC00 60 25K5 ELP

Dimensions (mm)




| | a | a1 | b | b1 | h |
|----------|-----|-----|-----|-----|----|
| Standard | 345 | 390 | 355 | 445 | 60 |

Weight (kg)

| | |
|----------|-----|
| Standard | 3,7 |
|----------|-----|



Suspension Set

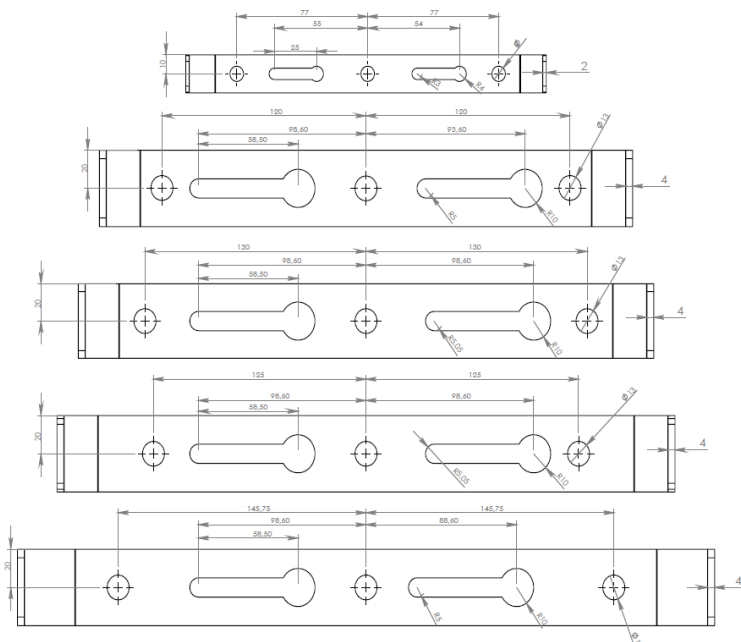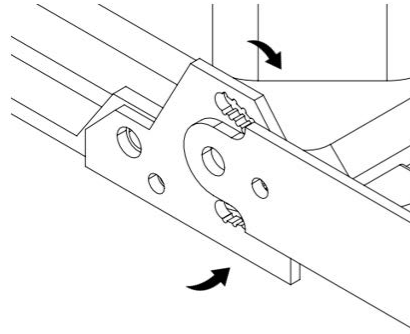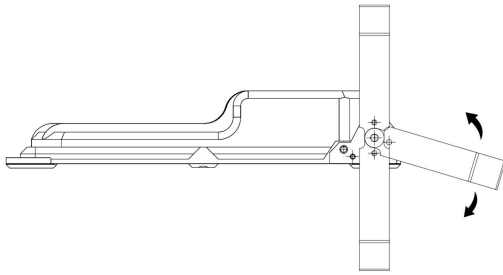

50 W ÜRÜN
ASKI



100 W ÜRÜN
ASKI



150 W ÜRÜN
ASKI



200 W ÜRÜN
ASKI



300 W ÜRÜN
ASKI



- EAE, reserves the right to make changes without prior notice.