



## ALBA

50 W LED Lighting luminaire for street Lighting



Order Code : 3306364  
Product Code : ALB 050D 40LN00 100 8K40 ELP 70CRI

### Product Data

#### Standard Features

Housing	: Aluminium Injection
Optic	: 100° lens
IP Grade	: IP66
Installation	: Pole mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off


#### Optical & Electrical Features

Power Consumption	: 50.4 W
Final Luminous Flux	: 8405.4 lm
Efficacy	: 166.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

#### Other Features & Conditions


Operating Temperature Range	: -25 °C/ +50 °C
Impact Resistance	: IK05
Led Life Time - L70	: > 72.000 saat @Ta= 50 °C

### Photometric Curve

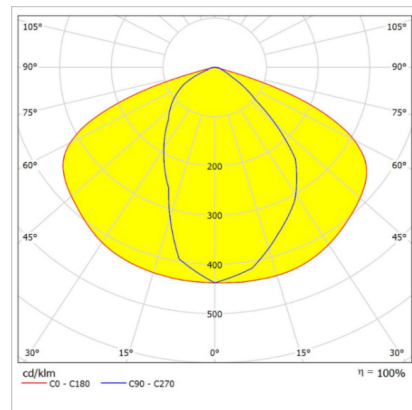

#### Optional Features

Correlated Color Temperatures	: 6500K
DALI Option	: Yes

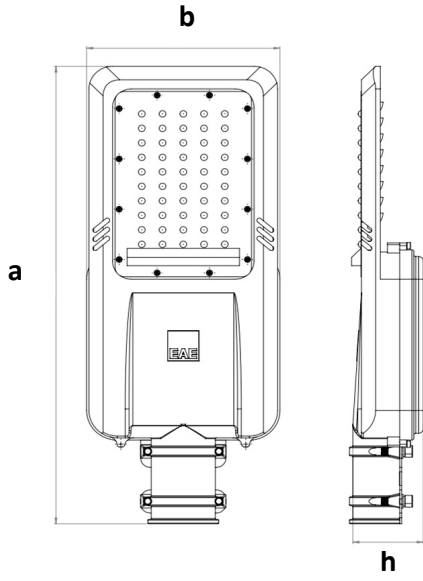

## ALBA

50 W LED Lighting luminaire for street Lighting


3306364 ALB 050D 40LN00 100 8K40 ELP 70CRI

### Dimensions (mm)

	a	b	h
Standard	505	205	74.5

### Weight (kg)

Standard 1.4

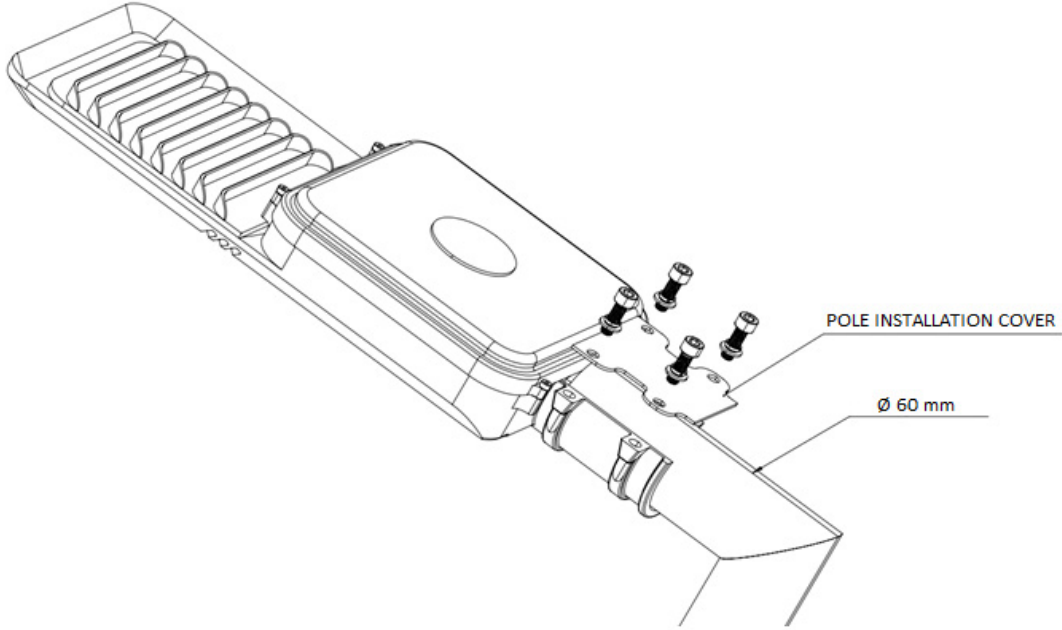

- EAE, reserves the right to make changes without prior notice.



Revizyon tarihi: 06.08.2024