

## ENDI NG

Recessed Mounted 24 W Indirect  
LED Luminaire

Order Code : 3345767  
Product Code : END 024A 40EN00 2K42 606020 NG



### Product Data


#### Standard Features

Housing	: 0,50mm Recessed mounted RAL9003 powder finished sheet steel
Diffuser	: Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED

#### Optical & Electrical Features

Power Consumption	: 23.5 W
Final Luminous Flux	: 2429.9 lm
Efficacy	: 103.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Photometric Curve

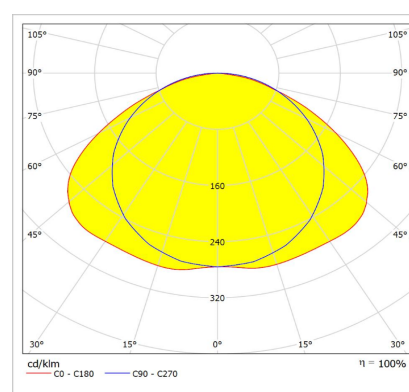

#### Other Features & Conditions

Operating Temperature Range	: -25 °C/+45 °C
Operating Temperature Range With Emergency ACK	: +5 °C/+40 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 102.000 hours @Ta= 45 °C


#### Optional Features

Ceiling Types	: Rock-wool and Clip-in
Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

# ENDING


Recessed Mounted 24 W Indirect LED Luminaire

3345767 END 024A 40EN00 2K42 606020 NG





Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	598,2	598,2	73,3	-
Plasterboard	598,2	598,2	73,3	560x560
Clip-in	598,2	598,2	73,3	-

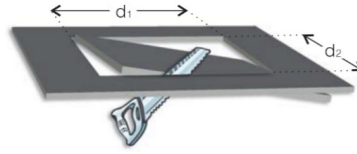

Weight (kg)

Standard	5,092
Emergency Kit (1-3 hr.)	5,25

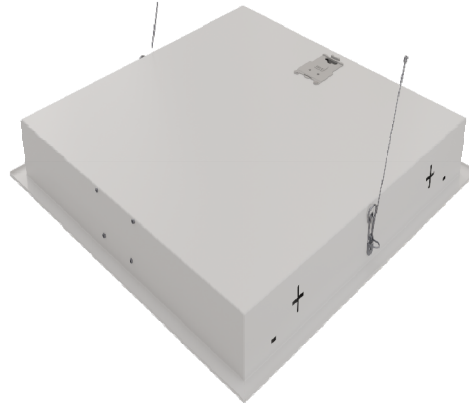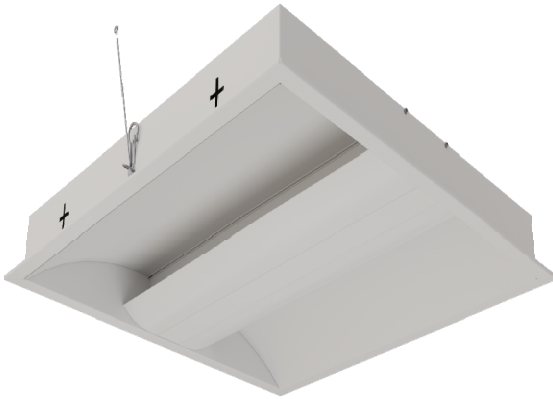

- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revision date: 02.08.2024