



## ORION

Surface Mounted 18 W LED Lighting Luminaire



Order Code : 3302916  
Product Code : ORN 018U 400D09 2K10 35 66 ELP

### Product Data


#### Standard Features

Housing	: Plastic Injection housing
Diffuser	: Opal diffuser
IP Grade	: IP66
Installation	: Surface mounted
Light Source	: Mid Power LED
Sensor	: Yes

#### Optical & Electrical Features

Power Consumption	: 17.7 W
Final Luminous Flux	: 2036.5 lm
Efficacy	: 115 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Photometric Curve

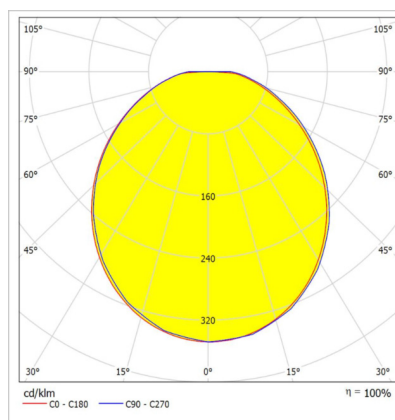



#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+40 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK08
Led Life Time - L70	: > 72.000 hours @ Ta=40 °C

## ORION

Surface Mounted 18 W LED Lighting Luminaire

3302916 ORN 018U 40OD09 2K10 35 66 ELP



### Dimensions (mm)

	Ø	h
SATURN With Built-in Sensor	350	118



- EAE Aydınlatma reserves the right to make any change without prior notice.



**EAE Aydınlatma A.Ş.**

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
[www.eaeaydinlatma.com.tr](http://www.eaeaydinlatma.com.tr)

Revizyon tarihi: 30.05.2023