



HBC LOWBAY

Surface Mounted 179 W LED High Bay Luminaire



Order Code : 3205029
Product Code : HBC 179U 40SC00 83 20K1 PC

Product Data

Standard Features

Housing	: SW 306G painted aluminium injection housing
Optic	: Lens 83°
Diffuser	: Tempered serigraphy glass
IP Grade	: IP66
Installation	: Surface mounted / Pendant
Light Source	: Mid Power LED

Optical & Electrical Features


Power Consumption	: 178.9 W
Final Luminous Flux	: 20101.8 lm
Efficacy	: 112.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 4 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photo-biologic Risk Group	: RG1

* There is $\pm 10\%$ tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -20 °C/+43 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK10
Led Life Time - L70	: > 72.000 hours @ Ta=43 °C

Photometric Curve

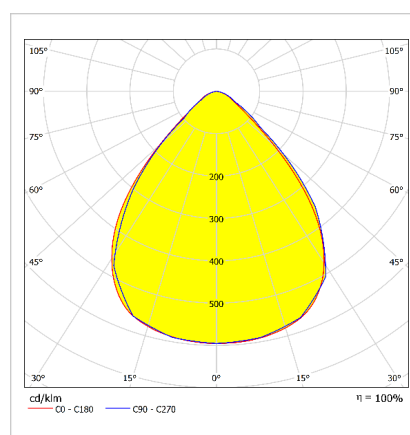

Optional Features


Correlated Color Temperatures	: 3000K, 5000K, 5700K, 6500K
DALI Option	: Yes

HBC LOWBAY

Surface Mounted 179 W LED High Bay Luminaire

3205029 HBC 179U 40SC00 83 20K1 PC

Standard



Dimensions (mm)


	a	b
Standard	Ø315	156

Weight (kg)

Standard	5,2
----------	-----



Suspension Set

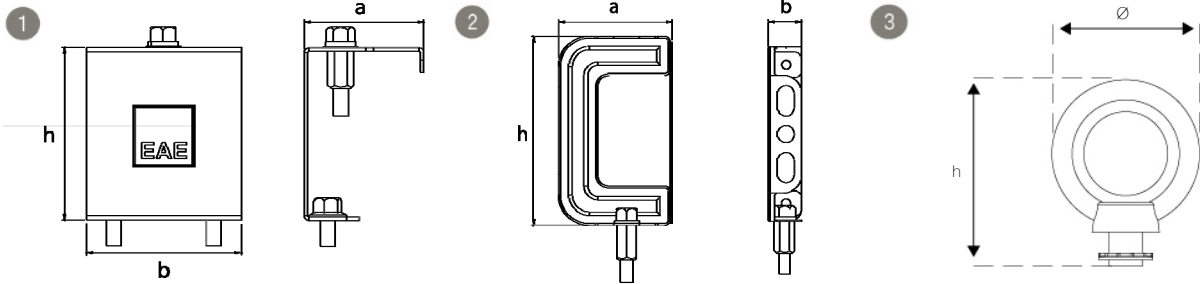

Cable Tray and Wall Hanger Set

Order Code : 3188242

Product Code : HBC STD TAVA ASKI TK

Busbar Hanger Set

Order Code : 3188241

Product Code : HBC STD BUSBAR ASKI TK

Pendant Single Hanger Set

Order Code : 3096325

Product Code : SRD SARKIT TEKLI ASKI TK

Suspension Set Dimensions (mm) and Weight (gr)

	a	b	h	Weight (gr)
1- Cable Tray and Wall Hanger Set	54.5	62	101.7	100
2- Busbar Hanger Set	55.3	17,3	92	100
3- Pendant Single Hanger Set	36	-	50,5	25

- EAE, reserves the right to make changes without prior notice.



Revision date: 16.11.2020