



DORIS

Recessed Mounted 8 W Spot Led
Lighting Luminaire



Order Code : 3190190
Product Code : DRS 008A 400D00 OK6 04 20

Product Data

Standard Features

Housing	: Plastic injection housing
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 7.6 W
Final Luminous Flux	: 632.6 lm
Efficacy	: 82.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 0.5 kV
Drive Current	: 200 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+30 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @Ta= 30 °C

Photometric Curve

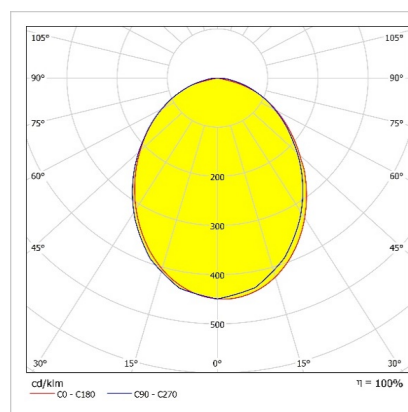


Optional Features

Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

DORIS


Recessed Mounted 8 W Spot Led Lighting Luminaire

3190190 DRS 008A 400D00 0K6 04 20

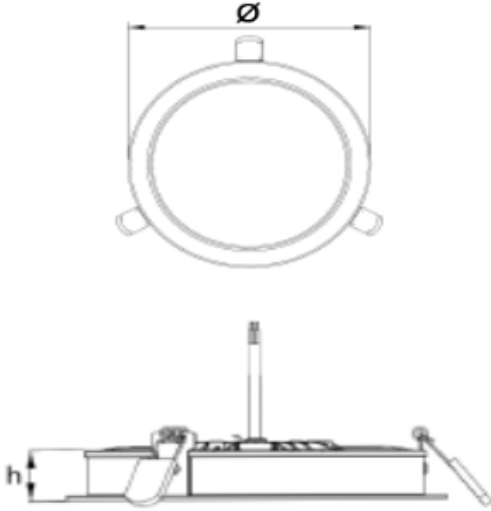

Dimensions (mm)

	Ø	h	Ø D
Recessed mounted	115	46	100



Weight (kg)

Standard	0.19
With Emergency Kit (3 hr.)	1

- EAE, reserves the right to make changes without prior notice.

 **engineering the light**

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 19.02.2020