



DORIS

Recessed Mounted 13 W Spot Led
Lighting Luminaire



Order Code : 3190214
Product Code : DRS 013A 400D00 1K5 08 20

Product Data

Standard Features

Housing	: Plastic injection housing
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 13.1 W
Final Luminous Flux	: 1449.1 lm
Efficacy	: 110 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 0.5 kV
Drive Current	: 350 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -20 °C/+30 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 60.000 hours @Ta= 30 °C

Photometric Curve

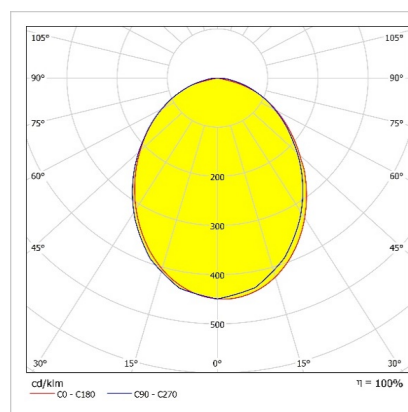


Optional Features

Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes

DORIS


Recessed Mounted 13 W Spot Led Lighting Luminaire

3190214 DRS 013A 400D00 1K5 08 20

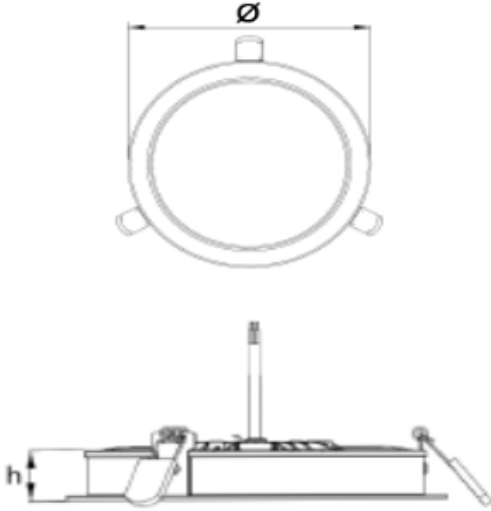

Dimensions (mm)

	Ø	h	Ø D
Recessed mounted	215	50	200



Weight (kg)

Standard	0,48
With Emergency Kit (3 hr.)	1,7

- EAE, reserves the right to make changes without prior notice.



Revision date: 19.02.2020