

## BLOOM IP65

Recessed Mounted 30x120cm 60W LED Luminaire



Order Code : 3209408  
Product Code : BLM 060A 400D00 6K9 301265

### Product Data

#### Standard Features

Housing	: 0,60mm Recessed mounted RAL9003 Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Recessed mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

#### Optical & Electrical Features


Power Consumption	: 59.7 W
Final Luminous Flux	: 6982.9 lm
Efficacy	: 116.7 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1300mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RG0

\* There is  $\pm 10\%$  Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+45 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 102.000 hours @ Ta=45 °C

### Photometric Curve

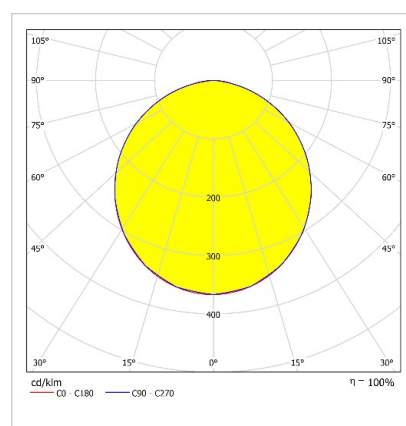


#### Optional Features

Ceiling Types	: Rock-wool, Clip-in
Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1,3 hours
DALI Option	: Yes

## BLOOM IP65


Recessed Mounted 30x120cm 60W LED Luminaire

3209408 BLM 060A 400D00 6K9 301265



### Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	1195	295	75	-
Plasterboard	1230	330	75	310x1210
Clip-in	1200	300	75	-

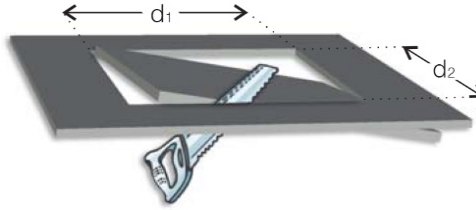

### Weight (kg)

Standard	8
With Emergency Kit (1 hr.)	9,4
With Emergency Kit (3 hrs.)	9.6

- EAE, reserves the right to make changes without prior notice.

 **engineering the light .**  
**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90  
**www.eaeaydinlatma.com.tr**

Revision date: 29.09.2022