

BLOOM IP65

Recessed Mounted 60x120cm 60W LED Luminaire



Order Code : 3209612
Product Code : BLM 060A 40OD00 7K7 601265

Product Data

Standard Features

Housing	: U,60mm Recessed mounted
Diffuser	: RAL9003 Powder finished sheet steel
Ceiling Type	: Plasterboard
IP Grade	: IP65
Installation	: Recessed mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

Optical & Electrical Features


Power Consumption	: 60.7
Final Luminous Flux	: 7732.9
Efficacy	: 127.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1400mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80
Photobiological Risk Group	: RG0

* There is $\pm 10\%$ Tolerance in Technical Values.

Other Features & Conditions

Operating Temperature Range	: -20 °C/+50 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK02
Led Life Time - L70	: > 102.000 hours @ Ta=50°C

Photometric Curve

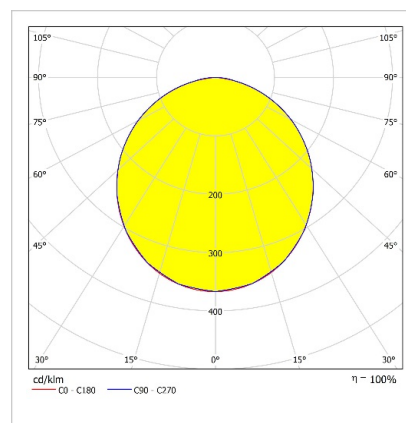

Optional Features

Ceiling Types	: Rock-wool, Clip-in
Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: 1,3 hours
DALI Option	: Yes



BLOOM IP65

Recessed Mounted 60x120cm 60W LED Luminaire

3209612 BLM 060A 400D00 7K7 601265

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	1195	595	95	-
Plasterboard	1230	630	95	610x1210
Clip-in	1200	600	95	-

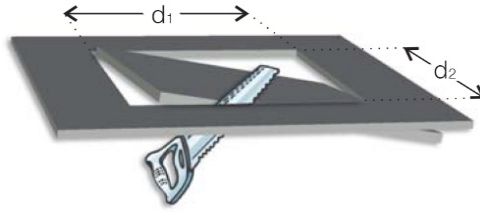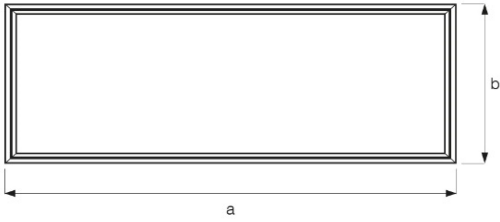

Weight (kg)

Standard	15,5
With Emergency Kit (1 hr.)	16,9
With Emergency Kit (3 hrs.)	17,1

- EAE, reserves the right to make changes without prior notice.



Revision date: 29.09.2022