



Recessed Mounted 60x60cm 50 W LED Luminaire



Photometric Curve


Power Consumption	: 48,3 W
Final Luminous Flux	: 6470,1 lm
Efficacy	: 133,9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 1400 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Ceiling Types	: Rock-wool, clip-in and surface mounted
Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005, 9010

BLOOM


Recessed Mounted 60x60cm 50 W LED Luminaire

3209039 BLM 050A 400D00 6K5 606020

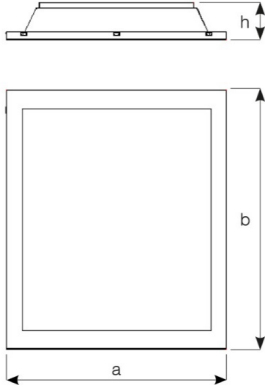

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	595	595	75	-
Plasterboard	595	595	75	580x580
Clip-in	600	600	75	-
Surface-mounted	611	611	83	-

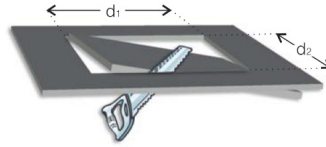

Weight (kg)

Standard	3,4
With Emergency Kit (1 hr.)	4,6
With Emergency Kit (3 hrs.)	5,1

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 24.09.2018

engineering the light