



## BLOOM

Recessed Mounted 30x120cm 30 W LED Luminaire



Order Code : 3266028  
Product Code : BLM 030A 400D00 3K7 301220

### Product Data


#### Standard Features

Housing	: 0,40mm Recessed mounted RAL9003 Powder finished sheet steel
Diffuser	: Opal diffuser
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed mounted
Light Source	: Mid Power LED
Electronic Control	: On/Off

#### Optical & Electrical Features

Power Consumption	: 29,6 W
Final Luminous Flux	: 3793,5 lm
Efficacy	: 127,8 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 1 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

### Photometric Curve

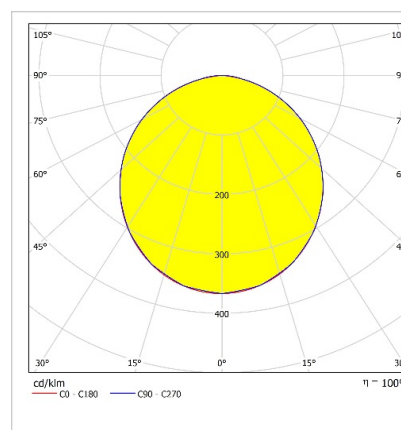

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK03
Led Life Time - L70	: > 102.000 hours @ Ta=35 °C


#### Optional Features

Ceiling Types	: Rock-wool, clip-in and surface mounted
Correlated Color Temperatures	: 3000K, 5700K, 6500K
Emergency Kit Options	: 1, 3 hours
DALI Option	: Yes
Color Option	: RAL 9005, 9010

# BLOOM


Recessed Mounted 30x120cm 30 W LED Luminaire

3266028 BLM 030A 40OD00 3K7 301220

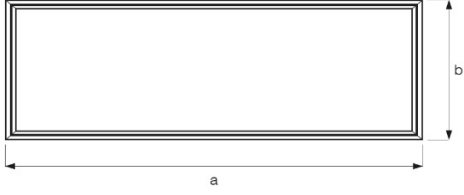

## Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	295	1195	75	-
Plasterboard	295	1195	75	255x1155
Clip-in	300	1200	75	-
Surface-mounted	304	928	82	-

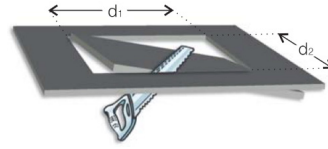

## Weight (kg)

Standard	4,8
With Emergency Kit (1 hr.)	6
With Emergency Kit (3 hrs.)	6,5

- EAE, reserves the right to make changes without prior notice.



**EAE Aydınlatma A.Ş.**

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TÜRKİYE **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90  
**www.eaeaydinlatma.com.tr**

**engineering the light**

Revision date: 06.10.2022