



## SHT

Recessed Mounted 30x30cm 20 W LED Luminaire



Order Code : 3241816  
Product Code : SHT 020A 40CM00 2K00 303065 80C

### Product Data

#### Standard Features

Housing	: Recessed Mounted RAL9010/SA8104 : Powder finished sheet steel
Diffuser	: Glass and opal diffuser
IP Grade	: IP65
Installation	: Recessed Mounted
Light Source	: Mid Power LED


#### Optical & Electrical Features

Power Consumption	: 18.8 W
Final Luminous Flux	: 1506 lm
Efficacy	: 80 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Surge Transient Protection	: > 0,9
Drive Current	: 4000K
Color Rendering Index	: >90
Photobiological Risk Group	: RG0

#### Other Features & Conditions

Operating Temperature Range	: -20 °C/+35 °C
Operating Temperature Range With Emergency Kit	: +5 °C/+35 °C
Impact Resistance	: IK 06
Led Life Time - L70	: > 72.000 hours @ Ta=35 °C

### Photometric Curve

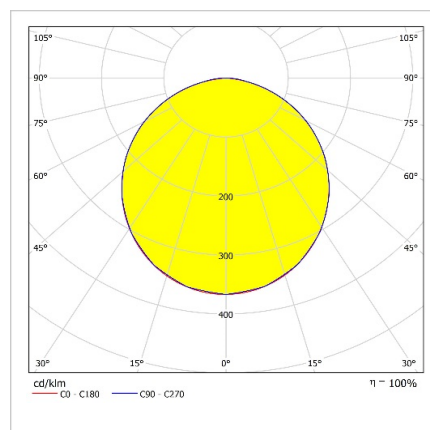


#### Optional Features

Ceiling Types	: Plasterboard, Rock-wool and Clip-in
Correlated Color Temperatures	: 3000K, 5700K
Emergency Kit Options	: 1,3 hours

## SHT


Recessed Mounted 30x30cm 20 W LED Luminaire

**3241816** SHT 020A 40CM00 2K00 303065 80C

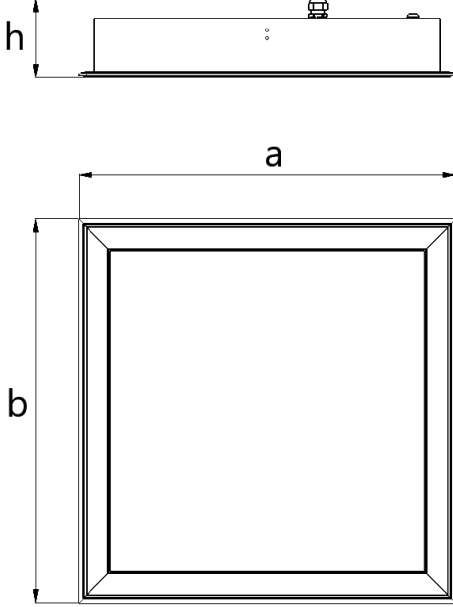

### Dimensions (mm)

	a	b	h	d <sup>1</sup> , d <sup>2</sup>
Rock-wool	295	295	120	-
Plasterboard	295	295	120	280x280
Clip-in	300	300	120	-



- EAE, reserves the right to make changes without prior notice.

**EAE Aydınlatma A.Ş.**  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY **Phone:** +90 212 413 21 00 (pbx) **Fax:** +90 212 549 37 90  
**www.eaeaydinlatma.com.tr**

Revision date: 31.07.2023