



Order Code : 3203622
Product Code : SHT 051A 40CM00 5K10 301565 90C

SHT

Surface mounted 30x120cm 51 W LED Luminaire



Product Data

Standard Features

Housing	Surface mounted RAL9010/SA8104 Powder finished sheet steel
Diffuser	Glass and opal diffuser
IP Grade	IP65
Installation	Plasterboard
Light Source	Mid Power LED
Electronic Control	On/Off


Optical & Electrical Features

Power Consumption	51.8 W
Final Luminous Flux	5081 lm
Efficacy	97.9 lm/W
Input Voltage	220-240 V AC
Frequency	50-60 Hz
Surge Transient Protection	> 0,9
Drive Current	4000K
Color Rendering Index	>90
Photobiological Risk Group	RG0

Other Features & Conditions

Operating Temperature Range	-20 °C/+35 °C
Operating Temperature Range With Emergency Kit	+5 °C/+35 °C
Impact Resistance	IK06
Led Life Time - L70	> 72.000 hours @ Ta=35 °C

Photometric Curve

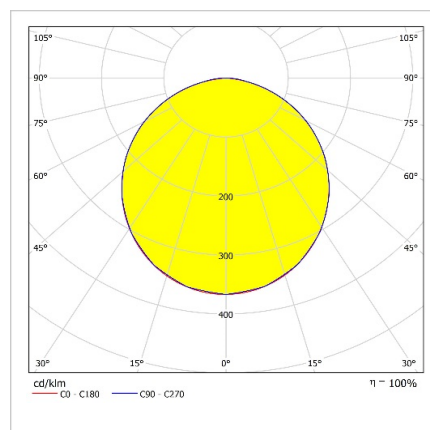


Optional Features

Ceiling Types	Rock-wool, Surface mounted and Clip-in
Correlated Color Temperatures	3000K, 5700K
Emergency Kit Options	1, 3 hours

SHT

Surface mounted 30x120cm 51 W LED Luminaire

3203622 SHT 051A 40CM00 5K10 301565 90C

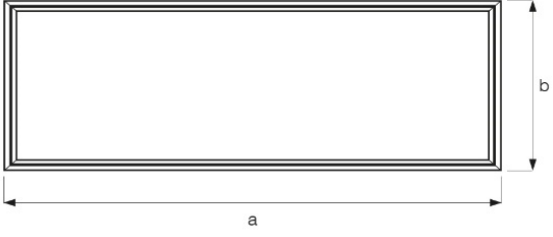

Dimensions (mm)

	a	b	h	d ¹ , d ²
Rock-wool	1496	296	120	-
Plasterboard	1506	306	120	285X1480
Clip-in	1500	300	120	-



Weight (kg)

Standard	14,8
With Emergency Kit (1 hr.)	15,4
With Emergency Kit (3 hrs.)	15,4

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 31.07.2023