



## Open Cell 8 W Spot LED Luminaire



## Photometric Curve

Power Consumption	: 8 W
Final LumiYesus Flux	: 797 lm
Efficacy	: 99.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: Yes
DALI Option	: Yes
Degree Option	: 24°



# ORI MESH SMALL

Open Cell 8 W Spot LED Luminaire

3325566 ORI 008H 40SD00 36 OK8 20 SML FLP

## Dimensions (mm)


	a	b	h	h1
Standart	57	57	100	15

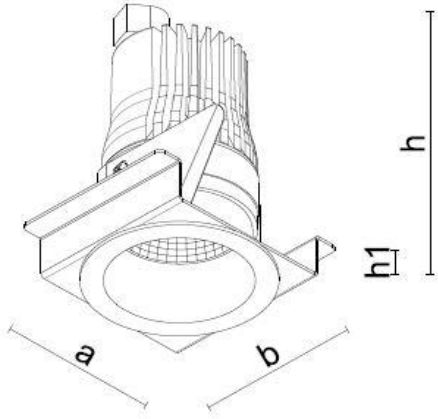

## Weight (kg)

Standard	0.220
----------	-------

## Mesh Tavan

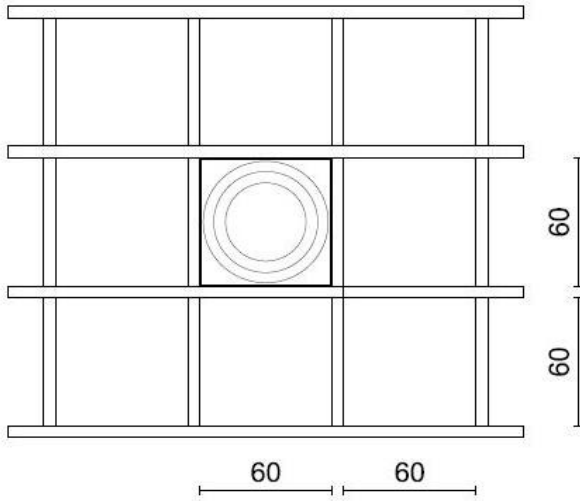

- EAE, reserves the right to make changes without prior Yestice.

**engineering the light**

EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TÜRKİYE  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 10.05.2024