



Recessed Mounted 14 W Spot LED Luminaire



Power Consumption	: 14 W
Final Luminous Flux	: 1411 lm
Efficacy	: 100,78 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Correlated Color Temperatures	: 2700K / 3000K / 6500K
Emergency Kit Options	: 1 / 3 Hours
DALI Option	: Yes
Degree Option	: 24° / 60°



LUP YV Recessed

Recessed Mounted 14 W Spot LED Luminaire

3297639 LUP 014A 40LN00 36 LLL 20 YV FLP

Dimensions (mm)

	Ø	h	ØD
Standart	85	55	76

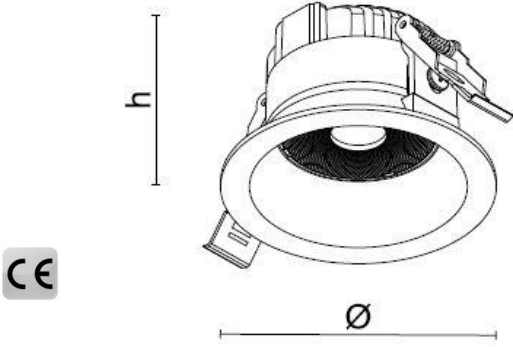

Weight (kg)

Standard	0.250
----------	-------

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL -TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 10.07.2023