



BISTA-YV SBT

Recessed Mounted 36W Spot LED Luminaire

Order Code : 3295606
Product Code : BST 036A 40SD00 40 4K2 YV V.2 SBT FLP



Product Data

Standard Features


Housing	: Aluminium injection housing
Diffuser	: 40° Reflector
Ceiling Type	: Plasterboard
IP Grade	: IP20
Installation	: Recessed Mounted
Light Source	: COB LED
Electronic Control	: On/Off

Optical & Electrical Features

Power Consumption	: 36W
Final Luminous Flux	: 3857.04 lm
Efficacy	: 107.14 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

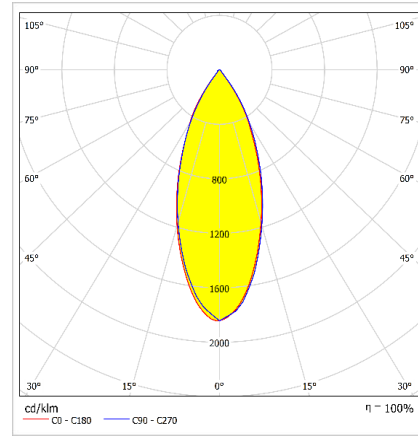

Diğer Özellikler

Çalışma Sıcaklık Aralığı	: -5 °C / +35 °C
Çalışma Sıcaklık Aralığı (ACK*)	: +5 °C / +35 °C
Darbe Dayanım Sınıfı (IK)	: IK03
Led Ömrü - L70	: 72.000 saat @Ta= 35 °C

Opsiyonel Özellikler

Renk Sıcaklığı	: 3000 / 3000K / 6500K
ACK Uyumluluğu	: 1 / 3 saat
DALI Uyumluluğu	: Var
Açı seçenekleri	: 24° / 60°



BISTA-YV SBT

Recessed Mounted 36W Spot LED Luminaire

3295606 BST 036A 40SD00 40 4K2 YV V.2 SBT FLP


Dimensions (mm)

	Ø	h	ØD
Standard	140	160	124

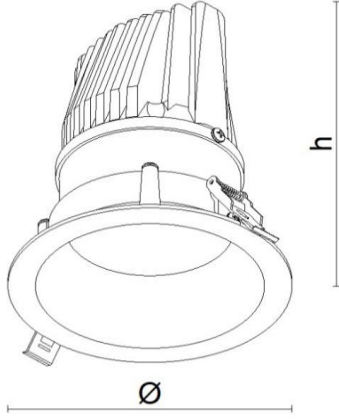

Weight (kg)

Standart	1.200
----------	-------

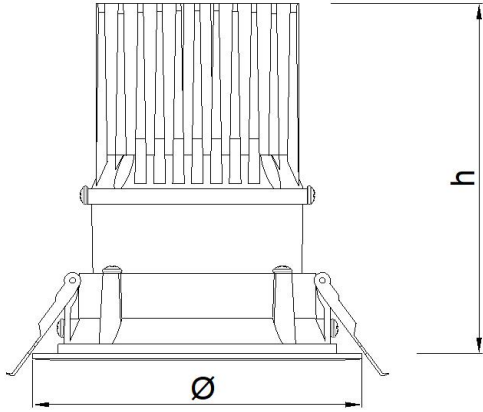

- EAE, reserves the right to make changes without prior notice.

engineering the light

EAE Aydınlatma A.Ş.
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 06.12.2022