



STORM TRACK

28 W LED Three-Phase Track Spot Luminaire

Order Code : 3292618
Product Code : STO 028F 40SD00 24 3K3 ADJ FLP



Product Data

Standard Features


| | |
|--------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° Reflector |
| IP Grade | : IP20 |
| Installation | : Three-Phase Track |
| Light Source | : COB LED |
| Electronic Control | : On/Off |

Optical & Electrical Features

| | |
|------------------------------|----------------|
| Power Consumption | : 28 W |
| Final Luminous Flux | : 3330 lm |
| Efficacy | : 119 lm/W |
| Input Voltage | : 220-240 V AC |
| Frequency | : 50-60 Hz |
| Power Factor | : Cos Ø > 0,9 |
| Correlated Color Temperature | : 4000K |
| Color Rendering Index | : >80 |

* There is ± 10% Tolerance in Technical Values.

Photometric Curve

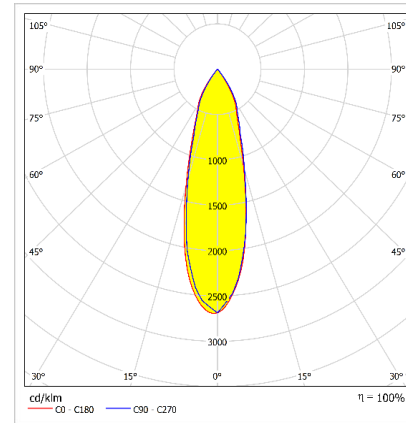

Other Features & Conditions

| | |
|-----------------------------|--------------------------|
| Operating Temperature Range | : -5 °C / +35 °C |
| Impact Resistance | : IK03 |
| Led Life Time - L70 | : 72.000 saat @Ta= 35 °C |


Optional Features

| | |
|-------------------------------|-------------------------|
| Correlated Color Temperatures | : 2700K / 3000K / 6500K |
| Emergency Kit Options | : No |
| DALI Option | : Please ask |
| Degree Option | : 40° |

STORM TRACK

28 W LED Three-Phase Track Spot Luminaire

3292618 STO 028F 40SD00 24 3K3 ADJ FLP

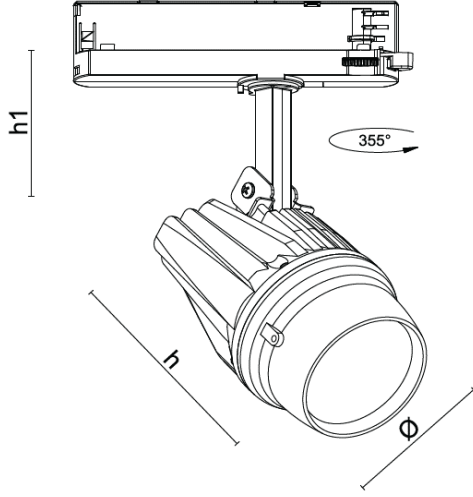

Dimensions (mm)

| | Ø | h | h1 |
|----------|----|-----|----|
| Standard | 90 | 138 | 60 |

Weight (kg)

| | |
|----------|-------|
| Standart | 1.140 |
|----------|-------|



- EAE, reserves the right to make changes without prior notice.





Revision Date: 1.07.2024





TRACK SYSTEM Ordering Table

| Ordering Code | Product Codes | Descriptions |
|---------------|-------------------------------------|--|
| 3061351 | TRIFAZE RAY 1MT GRI SIVA USTU FLP | Surface 3-Phase Lighting Tracks - Grey 1000(mm) |
| 3061352 | TRIFAZE RAY 1MT SIYAH SIVA USTU FLP | Surface 3-Phase Lighting Tracks - Black 1000(mm) |
| 3061350 | TRIFAZE RAY 1MT BEYAZ SIVA USTU FLP | Surface 3-Phase Lighting Tracks - White 1000(mm) |
| 3061356 | TRIFAZE RAY 2MT SIYAH SIVA USTU FLP | Surface 3-Phase Lighting Tracks - Black 2000(mm) |
| 3061354 | TRIFAZE RAY 2MT BEYAZ SIVA USTU FLP | Surface 3-Phase Lighting Tracks - White 2000(mm) |
| 3061360 | TRIFAZE RAY 3MT SIYAH SIVA USTU FLP | Surface 3-Phase Lighting Tracks - Black 3000(mm) |
| 3061359 | TRIFAZE RAY 3MT BEYAZ SIVA USTU FLP | Surface 3-Phase Lighting Tracks - White 3000(mm) |

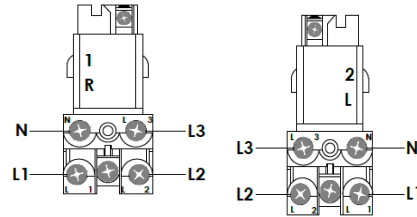

| Ordering Code | Product Codes | Descriptions |
|---------------|-------------------------------------|---|
| 3056387 | TRIFAZE RAY 1MT BEYAZ SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - White 1000(mm) |
| 3056390 | TRIFAZE RAY 2MT BEYAZ SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - White 2000(mm) |
| 3056393 | TRIFAZE RAY 3MT BEYAZ SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - White 3000(mm) |
| 3159825 | TRIFAZE RAY 1MT SIYAH SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - Black 1000(mm) |
| 3159824 | TRIFAZE RAY 2MT SIYAH SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - Black 2000(mm) |
| 3159826 | TRIFAZE RAY 3MT SIYAH SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - Black 3000(mm) |
| 3056391 | TRIFAZE RAY 2MT GRI SIVA ALTI FLP | Recessed 3-Phase Lighting Tracks - Grey 2000(mm) |

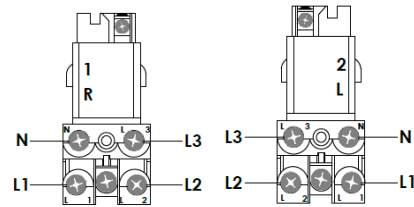

| Ordering Code | Product Codes | Descriptions |
|---------------|------------------------------|----------------------------|
| 3081749 | TRIFAZE RAY SOKETİ GRI FLP | 3 Circuits Adapter - Grey |
| 3062139 | TRIFAZE RAY SOKETİ SIYAH FLP | 3 Circuits Adapter - Black |
| 3081748 | TRIFAZE RAY SOKETİ BEYAZ FLP | 3 Circuits Adapter - White |




engineering the light

TRACK SYSTEM Ordering Table

| Ordering Code | Product Codes | Descriptions |
|---------------|------------------------------------|---|
| 3056466 | TRIFAZE RAY ENERJİ GIRIS GRI FLP | 3 Circuits Track Live-end Connector - Grey |
| 3056465 | TRIFAZE RAY ENERJİ GIRIS SIYAH FLP | 3 Circuits Track Live-end Connector - Black |
| 3056464 | TRIFAZE RAY ENERJİ GIRIS BEYAZ FLP | 3 Circuits Track Live-end Connector - White |



L




R


| Ordering Code | Product Codes | Descriptions |
|---------------|---|---|
| 3056282 | TRIFAZE RAY ARA BAGLANTI UZUN SIYAH FLP | 3 Circuits Track Middle Connector - Black |
| 3056281 | TRIFAZE RAY ARA BAGLANTI UZUN BEYAZ FLP | 3 Circuits Track Middle Connector - White |
| 3358331 | TRIFAZE RAY ARA BAGLANTI UZUN GRI FLP | 3 Circuits Track Middle Connector - Grey |




| Ordering Code | Product Codes | Descriptions |
|---------------|------------------------------------|--------------------------------------|
| 3056410 | TRIFAZE RAY ARA BAGLANTI SIYAH FLP | 3 Circuits Track Mini Joiner - Black |
| 3056408 | TRIFAZE RAY ARA BAGLANTI BEYAZ FLP | 3 Circuits Track Mini Joiner - White |
| 3358332 | TRIFAZE RAY ARA BAGLANTI GRI FLP | 3 Circuits Track Mini Joiner - Grey |




| Ordering Code | Product Codes | Descriptions |
|---------------|----------------------------------|--------------------------------------|
| 3061346 | TRIFAZE RAY T BAGLANTI BEYAZ FLP | 3 Circuits Track T Connector - White |
| 3358450 | TRIFAZE RAY T BAGLANTI GRI FLP | 3 Circuits Track T Connector - Grey |
| 3358454 | TRIFAZE RAY T BAGLANTI SIYAH FLP | 3 Circuits Track T Connector - Black |




L1



L2



R1





R2


engineering the light

TRACK SYSTEM Ordering Table

| Ordering Code | Product Codes | Descriptions |
|---------------|----------------------------------|-------------------------------------|
| 3056491 | TRIFAZE RAY L BAGLANTI SIYAH FLP | 3 Circuits Track T Connector -Black |
| 3056489 | TRIFAZE RAY L BAGLANTI BEYAZ FLP | 3 Circuits Track T Connector -White |
| 3358334 | TRIFAZE RAY L BAGLANTI GRI FLP | 3 Circuits Track T Connector -Grey |




| Ordering Code | Product Codes | Descriptions |
|---------------|---|--------------------------------|
| 3056284 | TRIFAZE RAY KAPAK SONLANDIRMA GRI FLP | 3 Circuits Track End Cap Grey |
| 3056285 | TRIFAZE RAY KAPAK SONLANDIRMA SIYAH FLP | 3 Circuits Track End Cap Black |
| 3056283 | TRIFAZE RAY KAPAK SONLANDIRMA BEYAZ FLP | 3 Circuits Track End Cap White |



| Ordering Code | Product Codes | Descriptions |
|---------------|-------------------------------------|--|
| 3056386 | TRIFAZE RAY TAVAN TASMICI SIYAH FLP | 3 Circuits Track Ceiling Carrier Black |
| 3156544 | TRIFAZE RAY TAVAN TASMICI BEYAZ FLP | 3 Circuits Track Ceiling Carrier White |
| 3358460 | TRIFAZE RAY TAVAN TASMICI GRI FLP | 3 Circuits Track Ceiling Carrier Grey |



Pre-drilled mounting holes in the lighting track frame in every 320 mm. Hole size 5x10 mm.

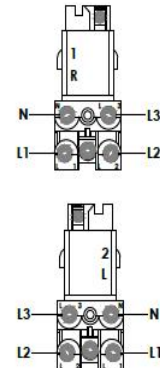

engineering the light