

## STL FRAME FLP

120 W Sarkit LED Armatür

Order Code : 3248621  
Product Code : STL 120S 400D00 11K6 5070TK3I 6012 FR FLP


### Product Data

#### Standard Features

Housing	: Aluminium extrusion housing
Diffuser	: Glare minimizing highly permeable diffuser
IP Grade	: IP 20
Installation	: Pendant
Light Source	: Mid Power LED
Electronic Control	: On/Off



### Photometric Curve

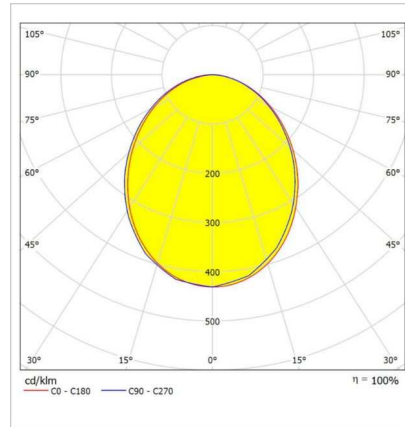

#### Optical & Electrical Features

Power Consumption	: 120 W
Final Luminous Flux	: 11.629 lm
Efficacy	: 96,91 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos Ø > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is ± 10% Tolerance in Technical Values.

#### Other Features & Conditions

Operating Temperature Range	: -5 °C/+35 °C
Impact Resistance	: IK 02
Led Life Time - L70	: 100.000 saat @Ta= 35 °C

#### Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: Yes
DALI Option	: Yes



# STL FRAME FLP

120 W Sarkit LED Armatür

3248621 STL 120S 40OD00 11K6 5070TK3I 6012 FR FLP

## Dimensions (mm)

	a	b	h	c
Tekli Modül	600	1200	70	50

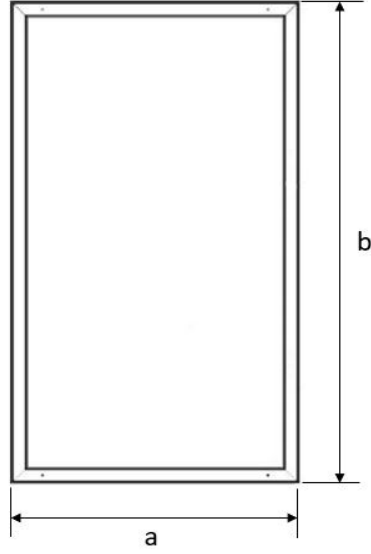


Steel Wire Suspension Kit (1,5 mt)

Order Code : 3242453

Product Code : STL ASKI TAKIMI FLP

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.  
İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY  
Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 04.03.2021