



## GPRONA V.2

364 W Front and Area LED Lighting Luminaires

Order Code : 3179659  
Product Code : GPR 364Z 50CM00 AS 57K1 V2



### Product Data

#### Standard Features

Housing	: SW 306G painted aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: Asymmetric reflector
IP Grade	: IP66
Installation	: Floor, wall, pole mounted
Light Source	: Mid Power Led


#### Optical & Electrical Features

Power Consumption	: 363.6 W
Final Luminous Flux	: 57148.7 lm
Efficacy	: 157.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 5000K
Color Rendering Index	: >80

#### Other Features & Conditions

Operating Temperature Range	: -25 °C/+50 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 50 °C

### Photometric Curve

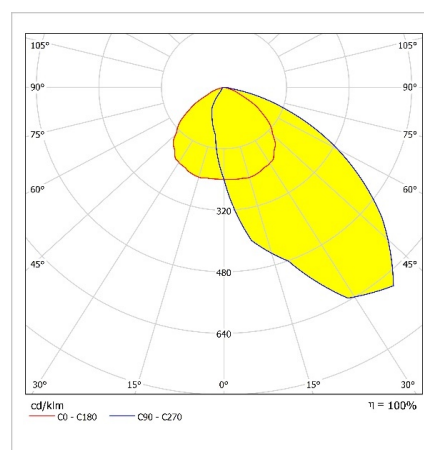


#### Optional Features

Correlated Color Temperatures	: 4000K, 5700K
Electronic Control	: Dali , 1-10 V DIMKO

# GPRONA V.2

364 W Front and Area LED Lighting Luminaires

3179749 GPR 364Z 50CM00 AS 57K1 V2

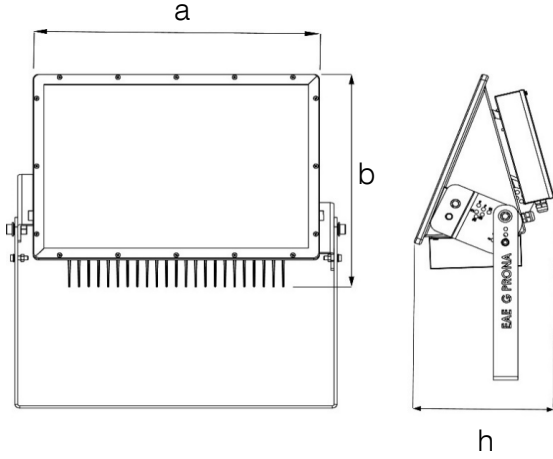

## Dimensions (mm)


	a	b	h
Standard	589	410	296

## Weight (kg)

Standard	27.5
----------	------




## Suspension Set

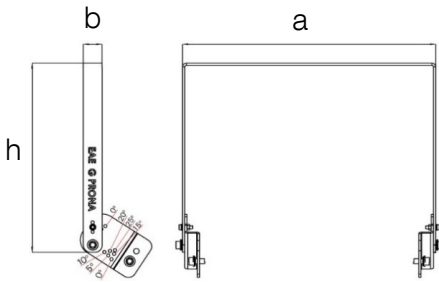

### Tall Hanger Set

Ordering Code : 3116720


a	b	h	Weight (kg)
662mm	50mm	506mm	3.68

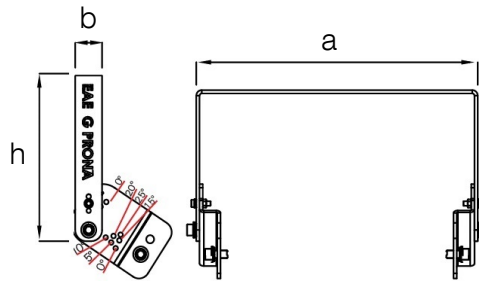

### Short Hanger Set

Ordering Code : 3117816

a	b	h	Weight (kg)
662mm	50mm	306mm	2.81

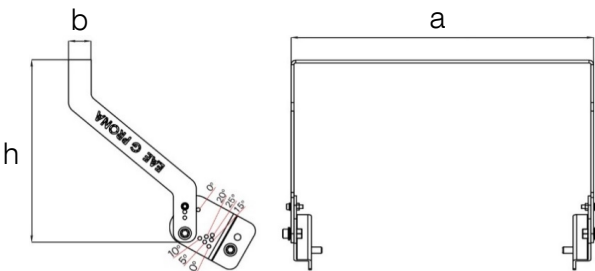


### Angled Hanger Set

Ordering Code : 3114842

a	b	h	Weight (kg)
662mm	50mm	406mm	3.76

## Hanger Set Bore Diameter Measures

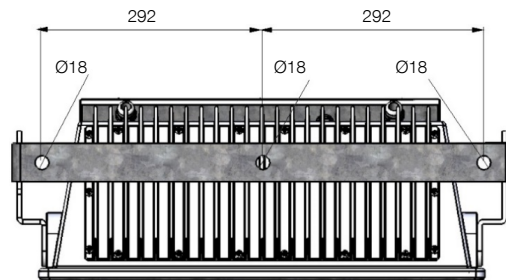

- EAE, reserves the right to make changes without prior notice.



Revision date: 14.08.2020