


Â<

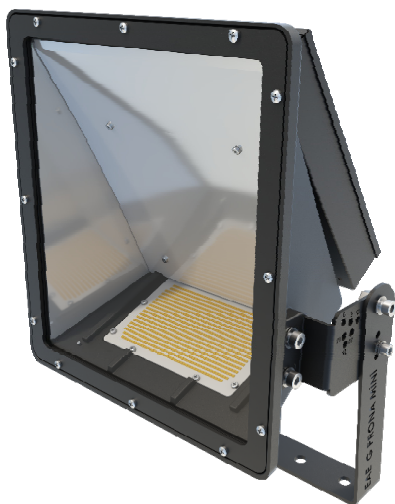

GPRONA MINI

156 W Front and Area LED Lighting Luminaires

Order Code : 3250322
Product Code : GPR 156Z 40CM00 AS 25K4 V.MN

Product Data

Standard Features

Housing	: SW 306G painted aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: Asymmetric reflector
IP Grade	: IP66
Installation	: Floor, wall, pole mounted
Light Source	: Mid Power Led

Optical & Electrical Features


Power Consumption	: 155.4 W
Final Luminous Flux	: 25449 lm
Efficacy	: 163.6 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 6 kV
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

Operating Temperature Range	: -25 °C/+50 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 102.000 hours @Ta= 50 °C



Photometric Curve

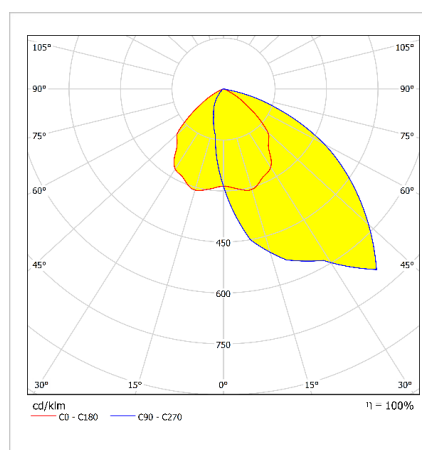


Optional Features

Correlated Color Temperatures	: 5000K, 5700K, 6500K
Electronic Control	: Dali , RF

GPRONA MINI

156 W Front and Area LED Lighting Luminaires

3250322 GPR 156Z 40CM00 AS 25K4 V.MN

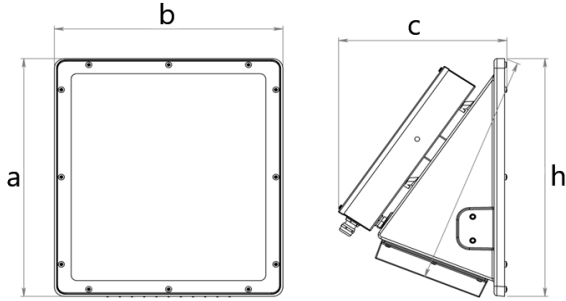



Dimensions (mm)

	a	b	c	h
Standard	420	375	276	420

Weight (kg)

Standard	11,8
----------	------



Suspension Set



Tall Hanger Set

Ordering Code : 3177884


a	b	h
426mm	50mm	344mm



Short Hanger Set

Ordering Code : 3177883

a	b	h
426mm	50mm	264mm

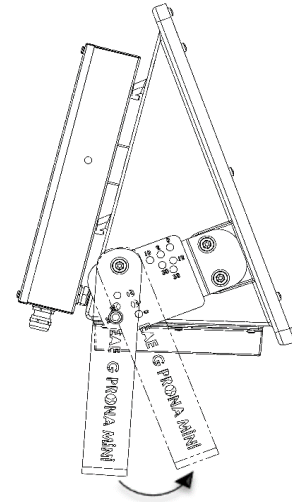

- EAE, reserves the right to make changes without prior notice.



Revision date: 10.08.2020