



## CITY POLE

70 W Parks and Gardens LED Lighting Luminaire



Order Code : 3337629  
Product Code : CTY 070Z 40LN00 8K1 66 PL 5H FLP

### Product Data

#### Standard Features


Housing	: Aluminium Housing (Chromate Conversion Pretreatment)
Optic	: Lens
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: SMD LED

#### Optical & Electrical Features

Power Consumption	: 2 x 35W
Final Luminous Flux	: 8120 lm
Efficacy	: 116 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos $\phi$ > 0,9
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

\* There is  $\pm$  10% Tolerance in Technical Values.

### Photometric Curve

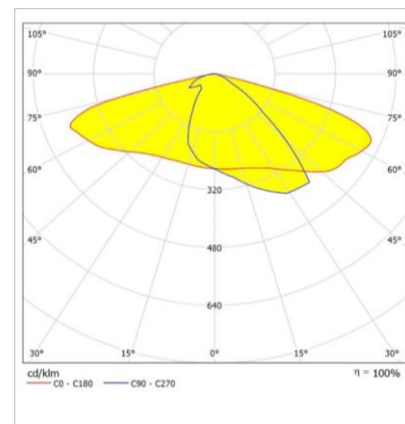

#### Other Features & Conditions

Operating Temperature Range	: -20°C / +45°C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 45 °C

#### Optional Features

Correlated Color Temperatures	: 3000K / 6500K
Emergency Kit Options	: No
DALI Option	: Yes


# CITY POLE

70 W Parks and Gardens LED Lighting Luminaire

3337629 CTY 070Z 40LN00 8K1 66 PL 5H FLP

## Dimensions (mm)

	a	b	h	h1
Standart	200	100	5000	850

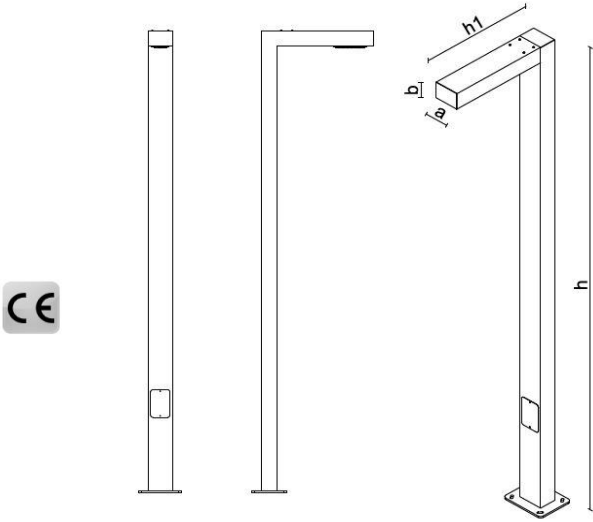

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY

Phone: +90 212 413 21 00 (pbx) Fax: +90 212 649 37 90

www.eaeaydinlatma.com.tr

Revision date: 18.03.2024